


## LKH-40, 60 Hz

Motor:	3600 rpm. synchr.
Tolerance:	±5%
Impeller, Max. dia.:	9.291"
Impeller, Min. dia.:	6.693"
Pump inlet, dia.:	3", DN 80
Pump outlet, dia.:	2", DN 65
Performance data refer to water at 68 °F	



**Note!** The curves refer to motor: 33.5 Hp, 2940 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with:  
 - 3% for 16.8-28.2 Hp.  
 - 5% for 11.5 Hp.

DO NOT FORGET THE SAFETY FACTOR

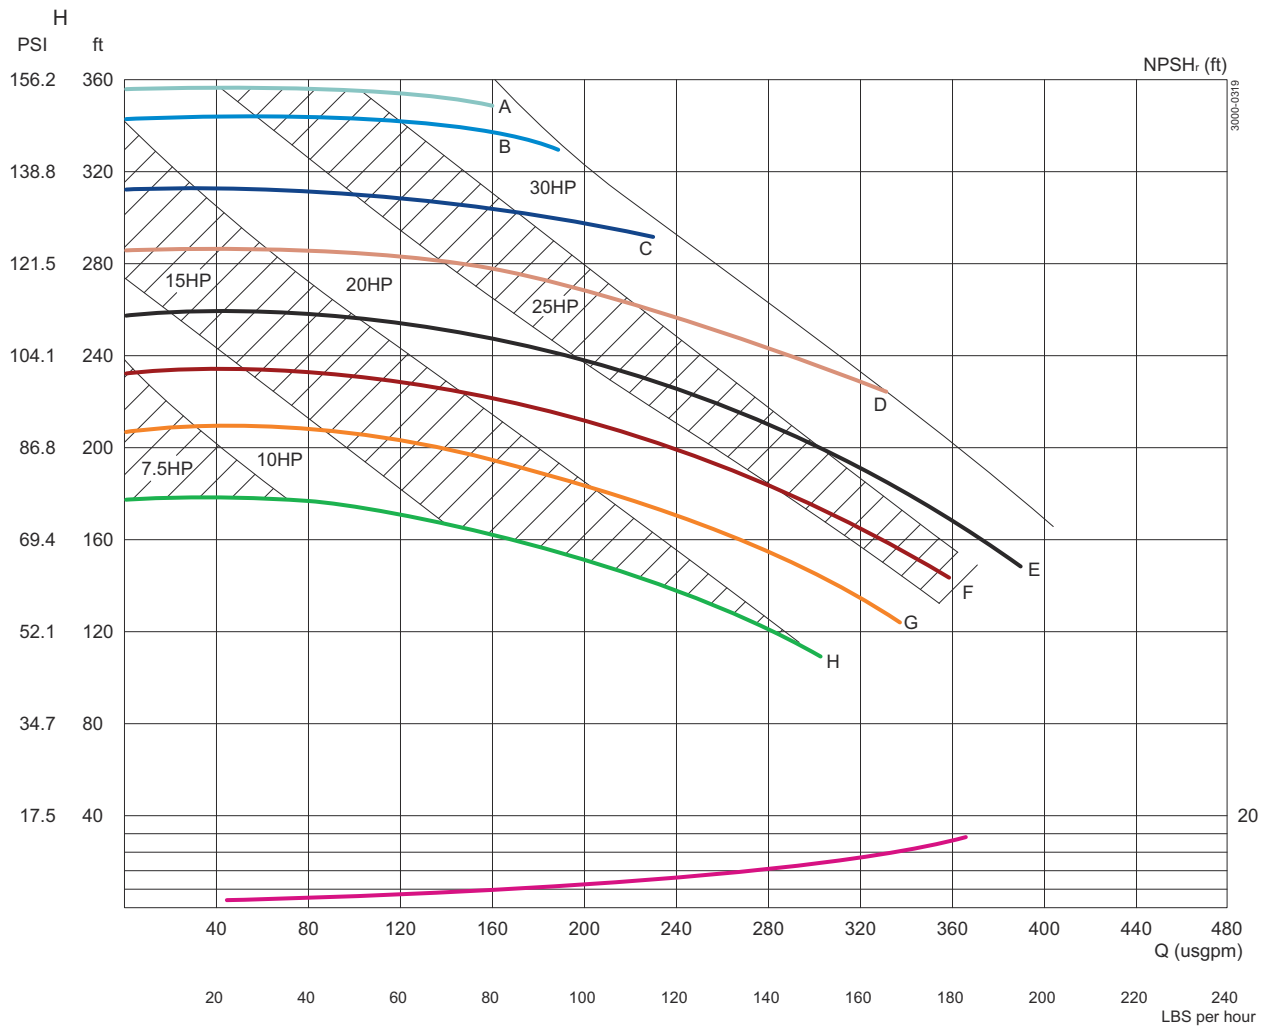

A = 9.252"	D = 8.268"	G = 7.087"
B = 9.055"	E = 7.874"	H = 6.693"
C = 8.661"	F = 7.480"	

## LKH-40, 60 Hz

Motor:	1800 rpm. synchr.
Tolerance:	±5%
Impeller, Max. dia.:	9.291"
Impeller, Min. dia.:	7.480"
Pump inlet, dia.:	3", DN 80
Pump outlet, dia.:	2", DN 65
Performance data refer to water at 68 °F	



**Note!** The curves refer to motor: 8.5 Hp, 1750 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with 5%

DO NOT FORGET THE SAFETY FACTOR

