

LKH-50, 60 Hz

Motor:	3600 rpm. synchr.
Tolerance:	±5%
Impeller, Max. dia.:	8.070"
Impeller, Min. dia.:	5.906"
Pump inlet, dia.:	4", DN 100
Pump outlet, dia.:	3", DN 80
Performance data refer to water at 68 °F	




Note! The curves refer to motor: 33.5 Hp, 3500 rpm. asynchr., 60 Hz.

For smaller motors, reduce head (H) with:

- 3% for 16.8-28.2 Hp.

- 5% for 8.5-11.5 Hp.

DO NOT FORGET THE SAFETY FACTOR

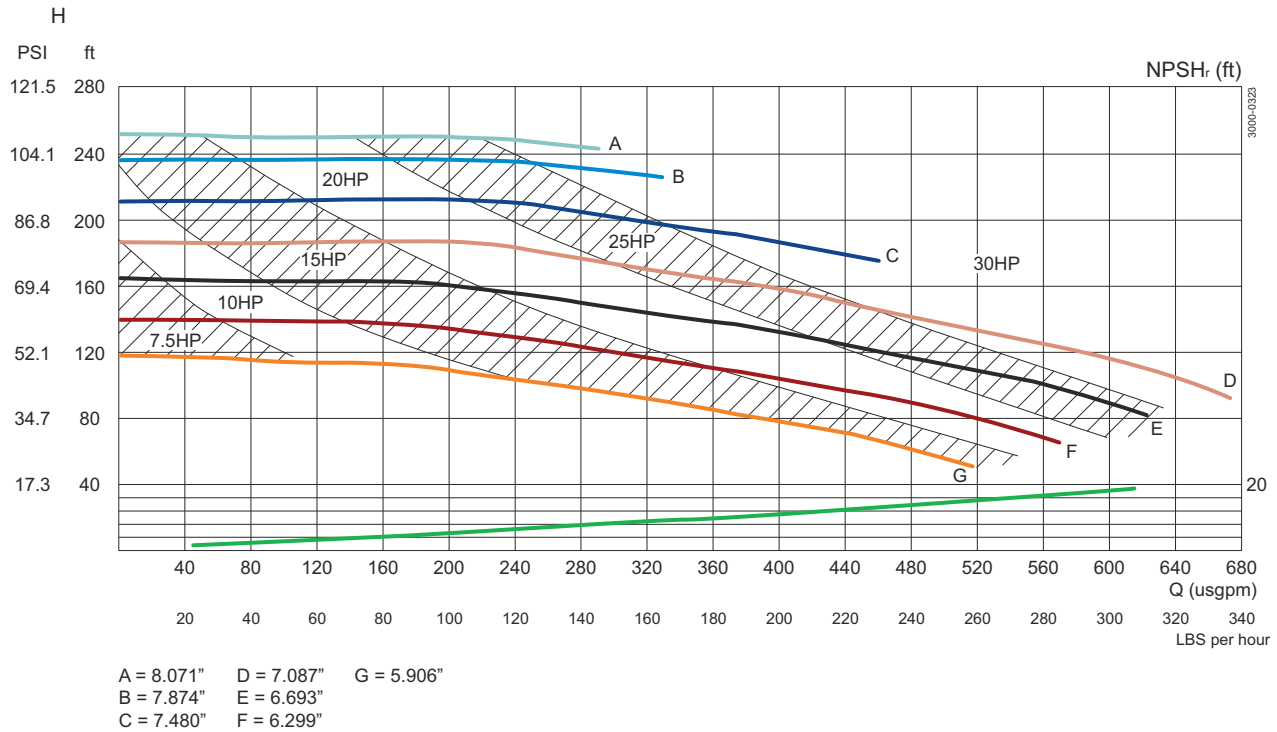

LKH-50, 60Hz

Motor:	1800 rpm. synchr.
Tolerance:	±5%
Impeller, Max. dia.:	8.070"
Impeller, Min. dia.:	6.693"
Pump inlet, dia.:	4", DN 100
Pump outlet, dia.:	3", DN 80
Performance data refer to water at 68 °F	



The curves refer to motor: 6.0 Hp, 1750 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with 5%

DO NOT FORGET THE SAFETY FACTOR

