

LKHUP-40, 60 Hz


Motor:	3600 rpm. synchron.
Tolerance:	±5%
Impeller, Max. dia.:	9.252"
Impeller, Min. dia.:	6.693"
Pump inlet, dia.:	3", DN 80
Pump outlet, dia.:	2", DN 65

Performance data refer to water at 68 °F



Note! The curves refer to motor: 33.5 Hp, 2940 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with:
 - 3% for 16.8-28.2 Hp.
 - 5% for 11.5 Hp.

DO NOT FORGET THE SAFETY FACTOR

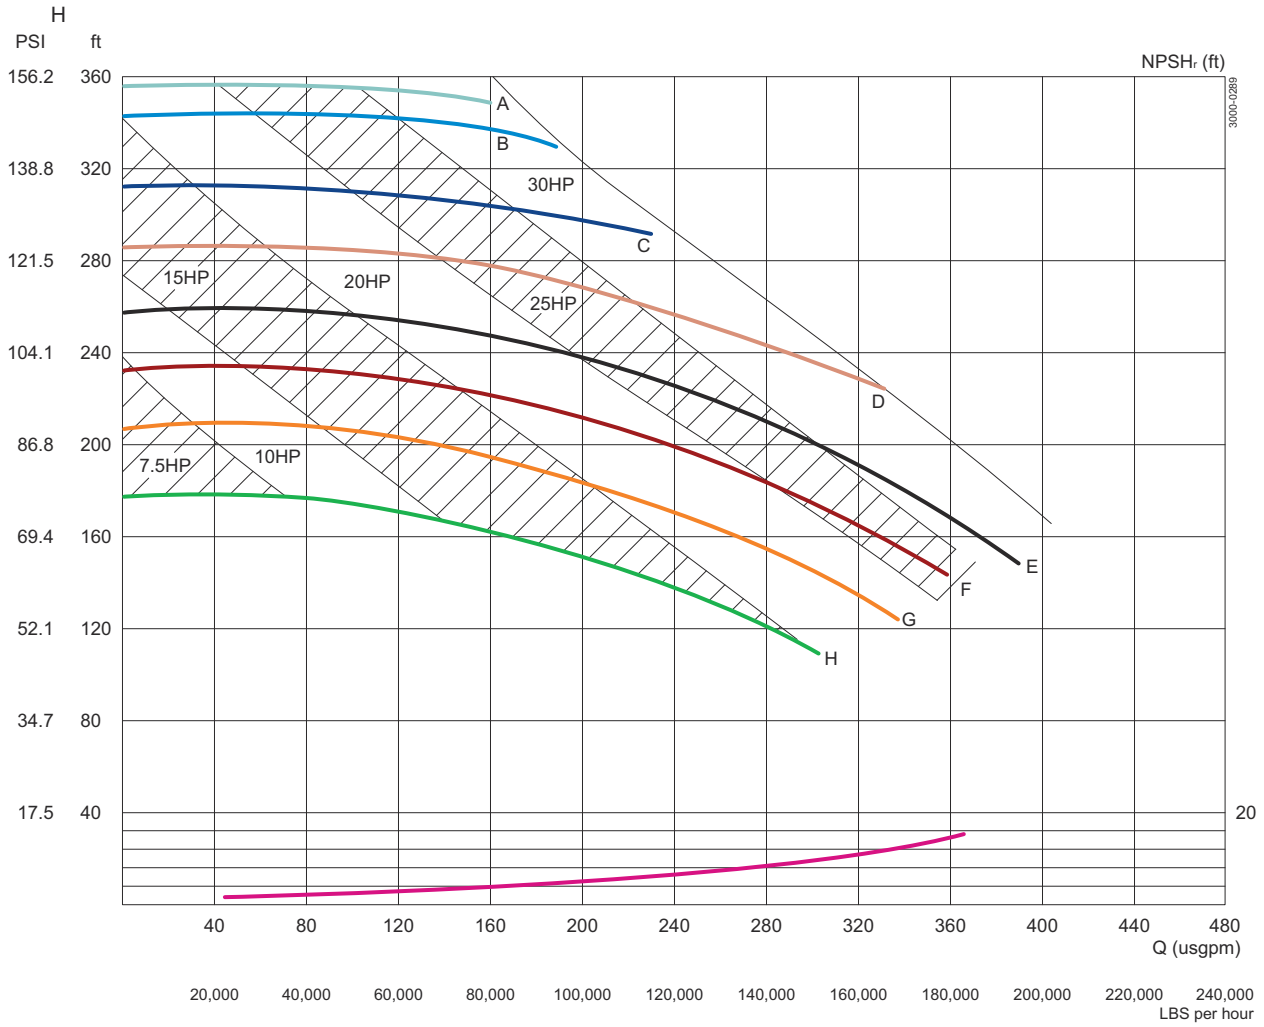

A = 9.252"	D = 8.268"	G = 7.087"
B = 9.055"	E = 7.874"	H = 6.693 "
C = 8.661"	F = 7.480"	

LKHUP-40, 60 Hz

Motor:	1800 rpm. synchron.
Tolerance:	±5%
Impeller, Max. dia.:	9.252"
Impeller, Min. dia.:	7.480"
Pump inlet, dia.:	3", DN 80
Pump outlet, dia.:	2", DN 65
Performance data refer to water at 68 °F	



Note! The curves refer to motor: 8.5 Hp, 1750 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with 5%

DO NOT FORGET THE SAFETY FACTOR

