


LKHUP-70, 60 Hz

Motor:	3600 rpm. synchron.
Tolerance:	±5%
Impeller, Max. dia.:	11.024"
Impeller, Min. dia.:	7.874"
Pump inlet, dia.:	4", DN 100
Pump outlet, dia.:	3", DN 80
Performance data refer to water at 68 °F	



Note! The curves refer to motor: 115.3 Hp, 3565 rpm. asynchr., 60 Hz.
For smaller motors, reduce head (H) with: -3%.

DO NOT FORGET THE SAFETY FACTOR

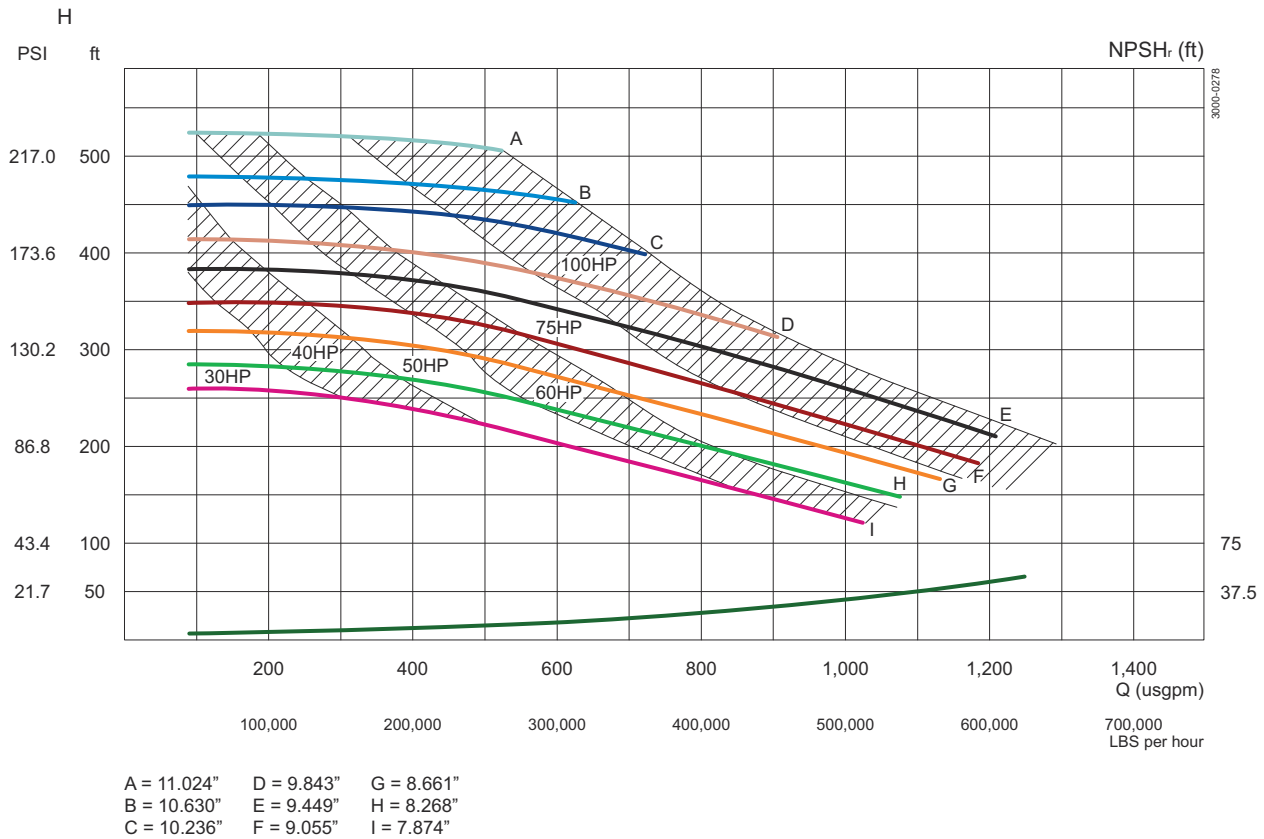


LKHUP-70, 60 Hz

Motor:	1800 rpm. synchr.
Tolerance:	±5%
Impeller, Max. dia.:	11.024"
Impeller, Min. dia.:	7.874"
Pump inlet, dia.:	4", DN 100
Pump outlet, dia.:	3", DN 80
Performance data refer to water at 68 °F	



Note! The curves refer to max. motor: 22.8 Hp, 1750 rpm. asynchr., 60 Hz.

DO NOT FORGET THE SAFETY FACTOR

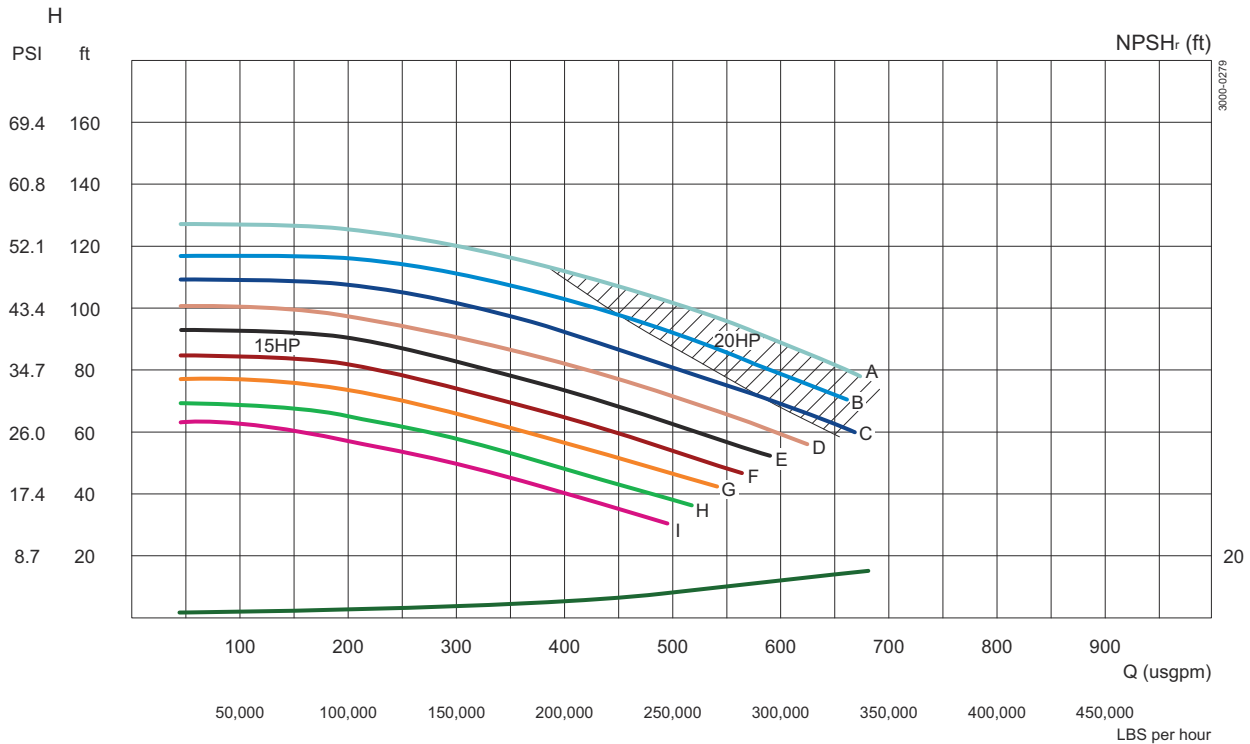

A = 11.024"	D = 9.843"	G = 8.661"
B = 10.630"	E = 9.449"	H = 8.268"
C = 10.236"	F = 9.055"	I = 7.874"

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com