

Homogenizer HL3

- Max. 53 (gal/min)
- Max. Homogenizing pressure up to 10,153 PSI
- Poppet valve and ball valve execution
- Max. motor power: 74 hp
- Weight with motor approx. 6,614 lbs
- Customized execution
- Optional with control cabinet incl. PLC control and touchpanel
- Optional in aseptic execution
- Designed and made in Germany




Technical changes reserved!

Poppet valves

For low viscosity and slightly abrasive products

Model	Max. Pressure (PSI)	Max. Capacity (GPM)
HL3-140T	2,031	53
HL3-180T	2,611	41
HL3-200T	2,901	37
HL3-250T	3,626	30
HL3-300T	4,351	24
HL3-350T	5,076	21
HL3-550T	7,977	13

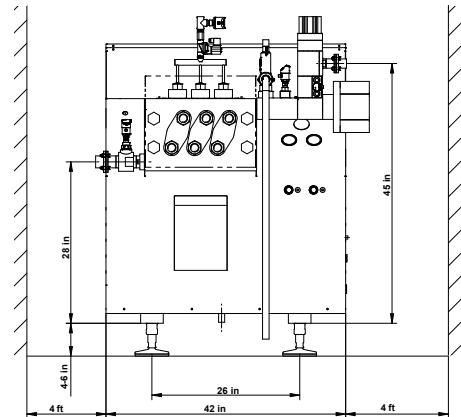

Ball valves

For high viscosity and abrasive products

Model	Max. Pressure (PSI)	Max. Capacity (GPM)
HL3-150K	2,176	42
HL3-200K	2,901	30
HL3-250K	3,626	24
HL3-300K	4,351	20
HL3-350K	5,076	19
HL3-550K	7,977	11
HL3-700K	10,153	8

