

# Homogenizer HLI8

- Max. 277 (gal/min)
- Max. Homogenizing pressure up to 8,702 PSI
- Poppet valve and ball valve execution
- Max. motor power: 536 hp
- Weight with motor approx. 24,251 lbs
- Customized execution
- Control cabinet incl. PCL control and touchpanel
- Optional in aseptic execution with sterile water unit
- Integrated lubrication system


**Technical changes reserved!**

## Poppet valves

For low viscosity and slightly abrasive products



Model	Max. Pressure (PSI)	Max. Capacity (GPM)
HLI8-140T	2,031	277
HLI8-180T	2,611	264
HLI8-200T	2,901	255
HLI8-250T	3,626	209
HLI8-300T	4,351	167
HLI8-350T	5,076	150
HLI8-550T	7,977	88

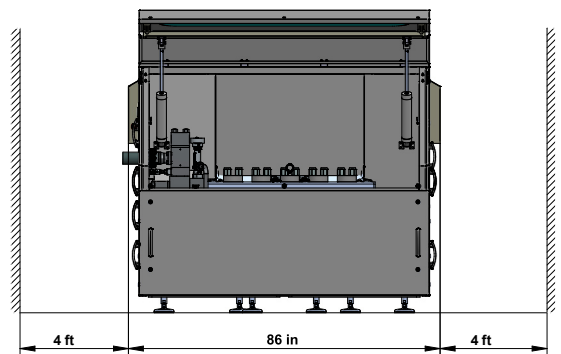

## Ball valves

For high viscosity and abrasive products

Model	Max. Pressure (PSI)	Max. Capacity (GPM)
HLI8-150K	2,176	269
HLI8-200K	2,901	238
HLI8-250K	3,626	194
HLI8-300K	4,351	154
HLI8-350K	5,076	119
HLI8-550K	7,977	84
HLI8-600K	8,702	75

